

DESCRIPTION


- One-piece fullcone nozzle
- Nozzle design prevents clogging
- Available spray angles 60°, 90°, 120°, 150°, 170°
- Other flow rates upon request
- BSPT-male thread
- Materials: brass, stainless steel (SS303, SS316L)
- Other materials and spray angles upon request
- NPT-thread and female thread upon request



TECHNICAL DATA

TYPE	Thread						Flow rate (lpm) @ pressure (Bar)								Dimensions (mm)	
	1/8"	1/4"	3/8"	1/2"	3/4"	1"	0.5	0.7	1	2	3	5	10	20	L1	L2
6	☑	☑	☑	-	-	-	2.3	2.7	3.2	4.5	5.5	71	10.1	14.3	30	43
8	☑	☑	☑	-	-	-	4.2	5.0	5.9	8.4	10.3	13.2	18.7	26.5	30	43
10	-	☑	☑	-	-	-	6.5	7.6	9.1	12.9	15.8	20.4	28.8	40.8	30	43
12	-	-	☑	-	-	-	9.7	11.4	13.7	19.3	23.7	30.6	43.2	61.1	30	43
14	-	-	☑	-	-	-	13.1	15.4	18.5	26.1	32.0	41.3	58.4	82.6	30	43
16	-	-	☑	-	-	-	17.1	20.2	24.2	34.2	41.8	54.0	76.4	108.0	30	43
20	-	-	☑	-	-	-	26.6	31.5	37.6	53.2	65	84	119.0	168.0	30	43
24	-	-	-	☑	-	-	38.8	46.0	54.9	78.0	95	123	174.0	246.0	43	57
28	-	-	-	☑	-	-	53.2	62.9	75.0	106.0	130.0	168.0	238.0	336.0	43	57
32	-	-	-	-	☑	-	67.7	80.0	96.0	135.0	166.0	214.0	303.0	428.0	47	66

DIMENSIONS

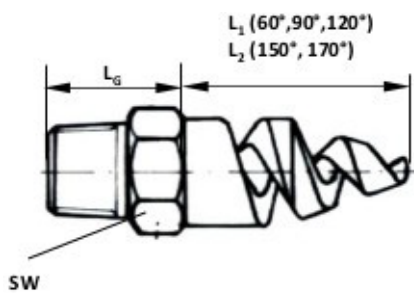

Thread	MALE	
	SW	LG
(mm)		
1/8"	14	13
1/4"	14	18
3/8"	17	18
1/2"	22	21
3/4"	27	23

HOW TO ORDER

Thread TWISTER type material
3/4" TWISTER 32 SS316