

DESCRIPTION


- The 3G washing heads are built in SS304 or 316L.
- They rotate on the PTFE bushes which guarantees perfect rotation with low noise levels.
- The head can be supplied with a clip-on or threaded connection.
- Material SS316L



TECHNICAL DATA

TYPE	Flow rate (lpm) @ pressure (Bar)					Thread (BSPT)	Spray Angle (°)	Maximum Spray diameter (m)
	1	2	3	4	5			
LSMOD3G.1	31	44	54	62	69	1/2" F	360°	1.5
LSMOD 3G.2	31	44	54	62	69	3/8" F	360°	1.5
LSMOD 3G.3	31	44	54	62	69	1/4" F	360°	1.5
LSMOD 3G.4	31	44	54	62	69	Clip 13.5-22mm	360°	1.5

DIMENSIONS

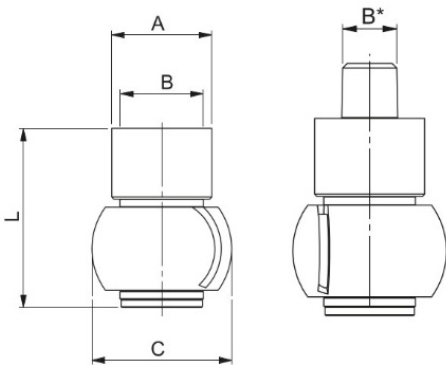

TYPE	Thread (BSPT)	Dimensions (mm)			
		A	B	C	L
LSMOD3G.1	1/2" F	24	1/2" F	34	43
LSMOD 3G.2	3/8" F	20	3/8" F	34	43
LSMOD 3G.3	1/4" F	20	1/4" F	34	54
LSMOD 3G.4	Clip 13.5-22mm	24	Clip 13.5-22mm	34	43

SPRAYING PATTERNS



HOW TO ORDER

Thread type material
1/2" F ALSMOD3G.1 SS316L