

DESCRIPTION

- Permits directional adjustment of the nozzle tip anywhere within a 45° included angle.
- Combines with Interchangeable Nozzle Tips that are available in Full Cone, Hollow Cone or Flat Spray styles with various combinations of spray angle and flow rate.
- The M1 is also available with a Threaded Ball Connection in 1/8", 1/4", 3/8" and 1/2" BSP, allowing the use of any threaded plastic, brass or steel nozzle.
- Standard material PP, some parts can also be delivered in Kynar for use with higher temperatures.
- All nozzles are available with a Single-Spring or an optional Double-Spring configuration for pressures over 4.0 bar.
- All nozzles are available in three spigot sizes, to fit 14 mm, 17mm and 19 mm diameter holes in the riser
- Corrosion resistant
- Impervious to most chemicals
- Good heat resistance
- Injection-molded from custom- blended polypropylene
- Resists clogging




M1 Holder + nozzle + cap



DIMENSIONS

PIPE SIZE	X (mm)	Y (mm)	XS spigot	Small Spigot 14mm	Regular Spigot 17mm	Large Spigot 19mm
19mm			Black	-	-	-
25mm	1"	43	-	Light blue	Blue	Light blue
32mm	1 1/4"	48	-	Pink	Red	Pink
40mm	1 1/2"	51	-	Mauve	Purple	Mauve
50mm	2"	57	-	Limegreen	Green	Limegreen

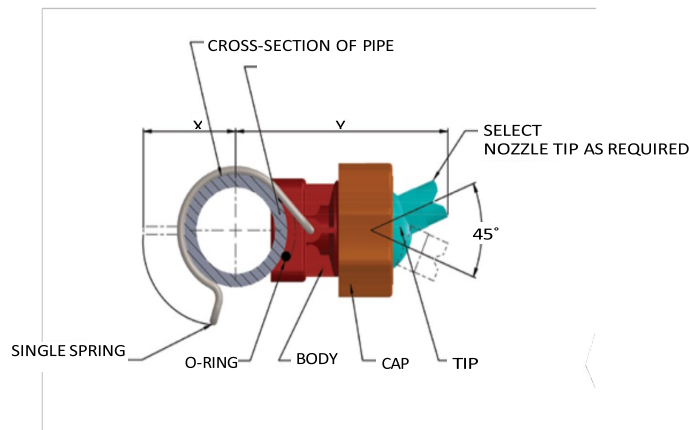

HOW TO ORDER

Thread M1 clamp type / Spigot size
1 1/4" Buisklem M1 C1/SP19mm