

## DESCRIPTION

- Flat, high impact spray pattern with thin minor axis.
- Maximum impact and velocity for any given pressure.
- Impact is higher with narrow spray angles for any given pressure.
- Spray angles are at 3 Bar.G.
- BSPT Thread
- Material: Stainless steel 303, 316L, brass
- Other materials upon request




## TECHNICAL DATA

Spray angle at 3Bar	TYPE	Thread						ORIFICE mm	Flow rate (lpm) @ pressure (Bar)					Afmetingen			
		1/8"	1/4"	3/8"	1/2"	3/4"	1"		1	2	3	5	10	L	LG	SW	C
15	10	-	☑	-	-	-	-	2.0	2.3	3.30	3.80	5.00	7.00	48	10	16	22
	20	-	☑	-	-	-	-	2.8	4.50	6.50	7.50	10.00	15.00	54	10	16	19
	30	-	-	☑	-	-	-	3.2	7.00	10.00	11.00	15.00	22.00	72	10	20	25
	40	-	-	☑	-	-	-	3.5	9.50	13.00	15.00	20.00	29.00	92	10	20	19
	50	-	-	☑	-	-	-	4.0	12.00	16.00	19.00	25.00	37.00	91	10	20	15
	60	-	-	-	☑	-	-	4.6	13.50	19.20	23.00	30.00	43.00	125	13	25	14
	80	-	-	-	☑	-	-	5.3	18.10	26.00	31.00	40.00	57.00	130	13	25	14
	100	-	-	-	☑	-	-	6.0	23.00	33.00	39.00	50.00	73.00	137	13	25	14
	200	-	-	-	-	☑	-	8.4	45.00	64.00	78.00	101.00	143.00	191	15	30	14
25	40	-	☑	-	-	-	-	3.7	9.00	12.80	15.50	20.00	29.00	65	10	19	25
35	4	☑	-	-	-	-	-	1.2	0.90	1.30	1.60	2.00	2.90	23	7	16	40
	10	-	☑	-	-	-	-	2.0	2.30	3.30	3.80	5.00	7.00	37	10	16	35
	20	-	☑	☑	-	-	-	2.6	4.50	6.40	7.80	10.10	14.30	42	10	20	30
	25	-	-	☑	-	-	-	2.9	5.60	8.00	9.80	12.60	17.90	49	10	20	8
	30	-	-	☑	-	-	-	3.3	6.80	9.60	11.70	15.10	21.00	52	10	20	28
	40	-	-	☑	-	-	-	3.5	9.50	13.00	15.00	22.00	29.00	58	10	20	25
	50	-	-	☑	-	-	-	4.0	12.00	16.00	19.00	25.00	37.00	64	10	20	23
	60	-	-	-	☑	-	-	4.5	13.50	19.10	23.00	30.00	43.00	73	13	25	27
	80	-	-	-	☑	-	-	5.2	18.00	26.00	30.00	40.00	58.00	81	13	25	24
	100	-	-	-	☑	-	-	6.0	23.00	33.00	38.00	50.00	73.00	89	13	25	20
	160	-	-	-	-	☑	-	7.5	37.00	52.00	60.00	80.00	114.00	114	15	30	23
	200	-	-	-	-	☑	-	8.4	45.00	64.00	78.00	101.00	143.00	122	15	30	23
40	40	-	-	☑	-	-	-	3.5	9.50	13.00	15.00	20.00	29.00	60	10	30	35
	50	-	-	☑	-	-	-	4.0	12.00	16.00	19.00	25.00	37.00	64	10	25	34
	60	-	-	☑	-	-	-	4.5	13.50	19.10	23.00	30.00	43.00	72	10	25	33
	70	-	-	☑	-	-	-	5.0	15.80	22.00	27.00	35.00	50.00	75	10	25	29
	80	-	-	☑	-	-	-	5.2	18.00	26.00	30.00	40.00	58.00	77	10	25	26
	90	-	-	☑	-	-	-	5.5	21.00	29.00	34.00	45.00	65.00	77	10	25	28
	100	-	-	☑	-	-	-	6.0	23.00	32.00	39.00	50.00	71.00	87	10	25	28

Spray angle at 3Bar	TYPE	Thread						ORIFICE mm	Flow rate (lpm) @ pressure (Bar)					Afmetingen			
		1/8"	1/4"	3/8"	1/2"	3/4"	1"		1	2	3	5	10	L	LG	SW	C
50	10	-	☑	-	-	-	-	2.0	2.30	3.30	3.80	5.00	7.00	31	10	16	60
	25	-	☑	☑	-	-	-	2.9	5.60	8.00	9.80	12.60	17.90	42	10	20	42
	40	-	☑	☑	-	-	-	3.5	9.00	12.80	15.60	20.00	29.00	47	10	20	45
	60	-	-	☑	-	-	-	4.4	13.50	19.20	23.00	30.00	43.00	55	10	25	37
	100	-	-	☑	-	-	-	6.0	23.00	32.00	39.00	50.00	71.00	72	10	30	40
	125	-	-	☑	-	-	-	6.7	28.00	41.00	49.00	63.00	89.00	72	10	30	40
	160	-	-	☑	-	-	-	7.5	36.00	51.00	63.00	81.00	114.00	72	10	30	37
	200	-	-	☑	-	-	-	8.3	46.00	64.00	76.00	101.00	147.00	72	10	30	32

**DIMENSIONS**

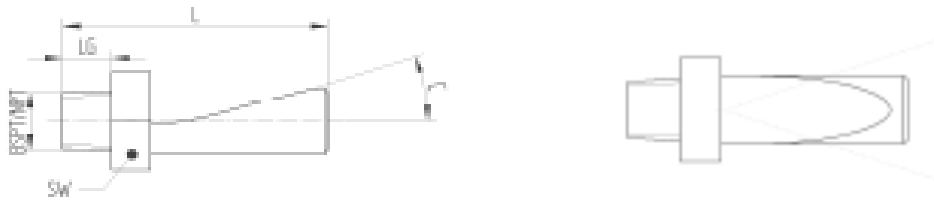

**HOW TO ORDER**

TEXTRA TJ type - spray angle material

**TEXTRA TJ 100 - 50° RVS316L**